

6548

SEP 15, 1965

6548

NATIONAL BUREAU OF STANDARDS REPORT

6548

THERMAL AND SELF-IGNITION PROPERTIES
OF
SIX EXPLOSIVES

by
J. J. Loftus
and
D. Gross



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

THE NATIONAL BUREAU OF STANDARDS

Functions and Activities

The functions of the National Bureau of Standards are set forth in the Act of Congress, March 3, 1901, as amended by Congress in Public Law 619, 1950. These include the development and maintenance of the national standards of measurement and the provision of means and methods for making measurements consistent with these standards; the determination of physical constants and properties of materials; the development of methods and instruments for testing materials, devices, and structures; advisory services to Government Agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; and the development of standard practices, codes, and specifications. The work includes basic and applied research, development, engineering, instrumentation, testing, evaluation, calibration services, and various consultation and information services. A major portion of the Bureau's work is performed for other Government Agencies, particularly the Department of Defense and the Atomic Energy Commission. The scope of activities is suggested by the listing of divisions and sections on the inside of the back cover.

Reports and Publications

The results of the Bureau's work take the form of either actual equipment and devices or published papers and reports. Reports are issued to the sponsoring agency of a particular project or program. Published papers appear either in the Bureau's own series of publications or in the journals of professional and scientific societies. The Bureau itself publishes three monthly periodicals, available from the Government Printing Office: The Journal of Research, which presents complete papers reporting technical investigations; the Technical News Bulletin, which presents summary and preliminary reports on work in progress; and Basic Radio Propagation Predictions, which provides data for determining the best frequencies to use for radio communications throughout the world. There are also five series of nonperiodical publications: The Applied Mathematics Series, Circulars, Handbooks, Building Materials and Structures Reports, and Miscellaneous Publications.

Information on the Bureau's publications can be found in NBS Circular 460, Publications of the National Bureau of Standards (\$1.25) and its Supplement (\$0.75), available from the Superintendent of Documents, Government Printing Office, Washington 25, D. C.

Inquiries regarding the Bureau's reports should be addressed to the Office of Technical Information, National Bureau of Standards, Washington 25, D. C.

NATIONAL BUREAU OF STANDARDS REPORT

NBS PROJECT

NBS REPORT

1002-12-10429

September 23, 1959

6548

THERMAL AND SELF-IGNITION PROPERTIES

of

SIX EXPLOSIVES

by

J. J. Loftus

and

D. Gross

for

Department of the Navy
Naval Ordnance Laboratory
White Oak
Ref. No. 60921/5089/58

IMPORTANT NOTICE

NATIONAL BUREAU OF STANDARDS
Intended for use within the Government. No part of this report should be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without prior written permission from the National Institute of Standards and Technology (NIST).

Approved for public release by the
Director of the National Institute of
Standards and Technology (NIST)
on October 9, 2015.

Progress accounting documents
If published it is subjected
production, or open-literature
It is obtained in writing from
each permission is not needed,
prepared if that agency wishes



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

THERMAL and SELF-IGNITION PROPERTIES of SIX EXPLOSIVES

J. J. Loftus and D. Gross

ABSTRACT

Measurements have been made of the specific heat, thermal conductivity and kinetic properties of six explosives. Based upon these measurements, estimates are provided of the self-ignition hazard associated with the use and bulk storage of these explosives.

INTRODUCTION

At the request of the Naval Ordnance Laboratory, determination of the thermal and kinetic properties of a number of propellants and explosives was initiated. This report summarizes the results of measurements on six explosives to supplement the results on three solid propellants reported in NBS Report No. 6111.

From these measurements and an analysis of the self-heating reaction, an estimation may be made of the self-ignition hazard associated with the use and bulk storage of such explosives. These measurements may also be useful for possible intercorrelation and interpretation of sensitivity data.

MATERIALS

The six explosive materials were furnished by the Naval Ordnance Laboratory in the shapes required for test. The designations were those supplied by Naval Ordnance Laboratory.

EXPERIMENTAL WORK

A. Kinetic Measurements

Cylindrical specimens 2-in. in diameter by 2-in. long were prepared by placing together two precut wafers 2-in. in diameter by 1-in. thick as furnished. Thermocouples were placed within the specimen which was assembled, placed in a stainless steel beaker, and mounted within a furnace designed for self-heating studies. The apparatus and method of analysis of the data have been described previously^{1, 2}.

At least two tests for each explosive were performed in order to establish satisfactory reproducibility between duplicate tests and the results are shown in Figure 1. Straight lines have been drawn through one set of points in each case and the activation energy E determined from the slopes. Comparative rates of self-heating at any temperature may be read directly from the graph by drawing a vertical line at the abscissa point corresponding to the temperature desired. For example, at 165°C ($1/T=.002283$), the explosives RDX, CYCLOTOL and DINA exhibited self-heating at the rates of 0.015, 0.25, and 7.5 deg C/min, respectively, whereas any self-heating of explosives Q, QR and TNT was below the limit of sensitivity of the apparatus used at this temperature.

The values of the kinetic constants determined from the lines in Figure 1 are listed in Table 1 for the applicable temperature ranges. Test observations and remarks are summarized below:

<u>MATERIAL</u>	<u>OBSERVATIONS</u>
TNT	Specimen melted at about 80°C Adiabatic control initiated at 190°C Very rapid combustion upon reaching 265°C ; specimen consumed.
RDX	Adiabatic control initiated at 168°C Short constant temperature phase at about 193°C Very rapid combustion upon reaching 200°C ; specimen consumed.
Q	Adiabatic control initiated at 247°C Constant temperature phase in range of $271\text{--}276^{\circ}\text{C}$ followed by very rapid combustion upon reaching 295°C ; specimen consumed.
QR	Adiabatic control initiated at 200°C Constant temperature phase at about 275°C followed by very rapid combustion. Specimen consumed except for approximately 10 gm of gray, crusty residue of same shape as test specimen (initial weight 180 gm) which remained following test.
DINA	Apparent melting at about 48°C Adiabatic control initiated at 126°C Very rapid combustion upon reaching 204°C ; specimen consumed.

MATERIAL

OBSERVATIONS

CYCLOTOL Apparent melting at about 67°C
Adiabatic control initiated at 151°C
Very rapid combustion upon reaching 204°C;
specimen consumed.

B. Specific Heat Measurements

Specimens for these measurements consisted of two pieces each 1-7/8 by 2 by 1/2 in. and each piece was sealed into an individual polyethylene plastic envelope. The specific heat of each specimen was measured by substituting it separately for 65.8 g of the initial 177.8 g of Varsol in a half-pint Dewar flask calorimeter, and measuring the energy equivalents of the calorimeter and contents electrically. The calorimeter was so constructed that the two pieces constituting a specimen formed two sides of a channel through which the Varsol was circulated by a centrifugal pump. Storage batteries supplied electrical energy to a submerged cartridge heater, measurements being made of the heater current I , heater resistance R and time of power input t . The energy input was calculated by the equation $E = I^2Rt/4.184$ calories. From the value obtained for the calorimeter and 177.8 g of Varsol and the values obtained when the specimens were tested, the specific heat of each specimen, including the plastic envelopes, were obtained. Varsol was used as the heat transfer fluid because of its low heat capacity, 0.4730 cal/g-deg C as measured over the experimental temperature range. The specific heat of the specimen was determined using a value of 0.55 cal/g-deg C for the specific heat of the polyethylene envelope. After the first run, all measurements were made over the same temperature range. Three tests on each specimen were performed and the results are summarized in Table 2.

Subsequent to the first tests on both TNT and RDX, some disintegration of each specimen due to Varsol leakage through the plastic envelopes was observed. The other four explosives showed very little or no disintegration. Repeat tests on the same specimens indicated that the Varsol attack did not appreciably affect the specific heat determinations.

C. Thermal Conductivity Measurements

Specimens for these measurements consisted of a circular disk of 6-in. diameter and of uniform thickness of approximately 0.5 in.

The thermal conductivity was determined in the conductive disc apparatus* consisting of a circular disc of metal sandwiched between two specimens which in turn are sandwiched between two water-cooled plates all of the same 6-in. diameter. The stainless steel conductive disc was uniformly heated at its edge by means of electrical resistance wire set in an edge groove. The heat generated at the disc edge tends to flow in the disc radially toward its center and also from the disc through the two specimens to two brass cold plates. These plates were maintained at a uniform temperature by circulating cold water through copper tubing soldered to them. Under steady-state conditions, the temperature of the conductive disc decreases toward its center. By measuring the temperature of the conductive disc at its center and at a suitable radius, temperatures V_0 and V , respectively, the effective conductance of the specimens can be calculated, if the temperatures of the cold plates and the conductivity and thickness of the disc metal are known.

It was decided to use only one explosive specimen for these measurements and therefore a "dummy" specimen was used in place of a duplicate of the principal specimen. This consisted of a 1-in. thick semirigid glass-fiber insulating board of stable low thermal conductivity (0.348 mw/cm C at 50°C). A thickness of 0.991 in. was maintained during use by three small fiber pegs thrust perpendicularly through the board. The lower, cold plate of the apparatus, the dummy specimen, and the conductive disc were fastened together with rubber cement to form a subassembly.

The apparatus was calibrated by measurements on six specimens of known thermal conductance in the range 0.3 to 4.4 mw/cm² C. The conductances of these specimens and of the dummy specimen were previously determined using the guarded hot plate apparatus (ASTM C177-45). A smooth curve drawn through these six points relates the observed ratio of temperatures V/V_0 of the conductive disc to the value of conductance of the specimen. Departures of the experimental calibration points from this calibration curve did not exceed one per cent.

Following calibration, measurements were made on the six explosive specimens. Care was taken to ensure good thermal contact between the specimen and the working surfaces. During the course of the measurements, two check readings were made on one of the six original calibration specimens (1.28 cm thick neoprene). The

* A paper giving a rigorous mathematical analysis of the conductive disc method and details of design and construction is being prepared for publication by H. E. Robinson, D. R. Flynn and T. W. Watson.

conductance of this specimen as determined in the hot plate was $2.494 \text{ mw/cm}^2 \text{ C}$ at 48°C while the check values were 2.50 and $2.56 \text{ mx/cm}^2 \text{ C}$, respectively. Therefore, a variation in results of 2.4 per cent was observed, to which the results on the explosives must be considered subject. The results are given in Table 3.

The two measurements made on TNT, at 33 and 38°C , indicate a negative temperature coefficient of conductivity. Because of the small difference in test temperatures, however, the uncertainty in this value ($\alpha = -0.011$ per deg C) is probably large.

To prevent the possibility of melting or softening, the cold plate temperature was maintained at a much lower temperature for those explosives exhibiting low temperature melting. This was accomplished by using chilled or ice water as the cold plate coolant. The specimen conductances were corrected to compensate for the change in the conductive disc conductivity when its mean temperature departed from the temperature during calibration (69°C).

D. Calculation of Critical Size

In order to estimate the critical size for ignition of a mass of self-heating material, the analysis presented by Enig, Shanks and Southworth^[37] was used. This related the half-thickness of a material of given thermal and kinetic properties with the temperatures at the center and the surface under critical steady-state conditions. This analysis has been applied to wood fiberboard and cotton linters and fair agreement with experimental results has been obtained^[47].

The assumption was made that the kinetic properties measured over higher temperature ranges may be applied to the temperature range of practical interest for ordinary storage ($20 - 100^\circ\text{C}$). It was further assumed that the measured thermal properties may be applied over the whole temperature range. These are broad assumptions, particularly for those materials for which the kinetic measurements were made on the liquid phase (DINA, CYCLOTOL and TNT).

Critical radius determinations for a sphere have been made for each explosive and are listed in Table 4, and shown graphically in Figure 2. It may be noted from the tables in reference ^[37] that, for a given surface temperature, the critical radius for a cylinder and the critical half-thickness for a semi-infinite slab are given very closely by $0.775 B_c$ and $0.514 B_c$ respectively, where B_c is the critical radius for the sphere.

SUMMARY

Measurements of the specific heat, thermal conductivity and kinetic properties of six explosives have been made and are summarized in Tables 1 to 3. In the self-heating experiments, initial self-heating was observed at temperatures ranging from 126°C for DINA to 247°C for Q. With one exception, all materials were completely consumed during the experiments; a grey, crusty residue comprising about 5 per cent of the initial weight remained following the burning of QR. Activation energy values as measured by this method ranged from 35.5 to 65.8 kcal/mole.

A comparison of critical radius determinations, under the given assumptions, is presented in Table 4 and Figure 2. Size limitations on the storage of bulk quantities of DINA, CYCLOTOL and TNT and careful control of temperature and ventilation conditions seem justified on the basis of these calculations. Of course, consideration must be given to melting or other phase transformations occurring at relatively low temperatures. In the case of DINA, CYCLOTOL and TNT (apparent) melting occurred at temperatures of about 48°C, 67°C and 80°C respectively. Explosives Q, QR and RDX do not appear likely to present any storage hazard with respect to self-ignition at ordinary storage temperatures.

ACKNOWLEDGMENT

The specific heat measurements were made by E. S. Newman and the thermal conductivity measurements by D. R. Flynn.

REFERENCES

1. Raskin, W. H. and Robertson, A. F., "An Adiabatic Apparatus for the Study of Self-Heating of Poorly Conducting Materials," Rev. Sci. Inst. 25, 541-544 (June 1954).
2. Loftus J. J. and Gross, D., "Thermal and Self-Ignition Properties of Three Solid Propellants," NBS Rep. 6111.
3. Enig, J. W., Shanks, D. and Southworth, R. W., "The Numerical Solution of the Heat Conduction Equation Occurring in the Theory of Thermal Explosions," NAVORD Rep. 4377 (1956) Astia Document No. AD-116 873.
4. Gross, D. and Robertson, A. F., "Self-Ignition Temperatures of Materials from Kinetic Reaction Data," J. Research NBS 61, 413-417 (Nov 1958)

Table 1. Kinetic Measurements

Material	Temperature Range °C	State	Activation Energy E kcal/mole	Heat Generation Coefficient A cal/sec-cm ³
TNT	220-260	Liquid	37.0	7.80×10^{13}
RDX	170-200	Solid	57.2	3.47×10^{24}
Q	250-270	Solid	65.8	7.45×10^{23}
QR	200-275	Solid	38.6	5.43×10^{13}
DINA	130-175	Liquid	35.5	2.72×10^{16}
CYCLOTOL	155-180	Liquid	43.6	1.03×10^{19}

Table 2. Specific Heat Measurements

Material	Sample Weight g	Envelope Weight g	Temp. Rise deg C	Mean Temp. °C	Specific Heat cal/g-deg C	
TNT	98.7262	2.3383	1.68	23.8	0.2592	
			3.31	24.5	0.2742	
			"	"	.2582	0.264
RDX	102.0285	2.7555	"	"	0.2687	
			"	"	.2612	
			"	"	.2633	0.264
Q	112.6514	2.5743	"	"	0.2732	
			"	"	.2586	
			"	"	.2501	0.261
QR	107.1495	1.5606	"	"	0.2575	
			"	"	.2566	
			"	"	.2595	0.258
DINA	99.0307	1.4618	"	"	0.2713	
			"	"	.2732	
			"	"	.2700	0.272
CYCLOTOL	104.3517	1.5324	"	"	0.2537	
			"	"	.2608	
			"	"	.2614	0.259

Table 3. Thermal Conductivity Measurements

Material	Thickness cm	V/Vo	Cold Plate		Disc Temperature		Mean Temp. °C	Thermal Conductivity, k mw/cm °C	cal/sec cm °C
			Temp. °C	Center °C	At R=5.08cm °C	Mean °C			
TNT	1.272	1.1094	24.72	40.18	41.87	41	33	2.04	0.000487
TNT	1.272	1.1029	24.57	50.36	53.01	52	38	1.93	0.000461
RDX	1.281	1.1083	21.97	51.19	54.35	53	37	2.05	0.000490
Q	1.273	1.1354	23.24	47.17	50.42	49	36	2.59	0.000619
QR	1.272	1.1316	18.89	44.25	47.21	46	33	2.50	0.000597
DINA	1.270	1.1275	0.05	12.00	13.52	13	6	2.33	0.000557
CYCLOTOL	1.271	1.1358	6.74	18.17	19.72	19	13	2.15	0.000600

Table 4. Critical Size Calculations

Critical Radius of a Sphere

Material	Surface Temperature			
	20°C (68°F)	48.9°C (120°F)	82.2°C (180°F)	100°C (212°F)
TNT	6.4 x 10 ⁵ cm 2.1 x 10 ⁴ ft	4.0 x 10 ⁴ cm 1300 ft	3000 cm 97 ft	880 cm 29 ft
RDX	8.0 x 10 ⁷ 2.6 x 10 ⁶	1.1 x 10 ⁶ 3.5 x 10 ⁴	1.8 x 10 ⁴ 590	2700 90
Q	3.0 x 10 ¹¹ 1.0 x 10 ¹⁰	2.1 x 10 ⁹ 6.9 x 10 ⁷	1.8 x 10 ⁷ 6.1 x 10 ⁵	2.1 x 10 ⁶ 6.9 x 10 ⁴
QR	3.2 x 10 ⁶ 1.1 x 10 ⁵	1.8 x 10 ⁵ 5900	1.2 x 10 ⁴ 390	3300 110
DINA	9700 320	700 23	57 1.9	18 0.6
CYCLOTOL	5.0 x 10 ⁵ 1.6 x 10 ⁴	1.9 x 10 ⁴ 620	860 28	210 6.8

RATE OF TEMPERATURE RISE, DEG. C / MIN.

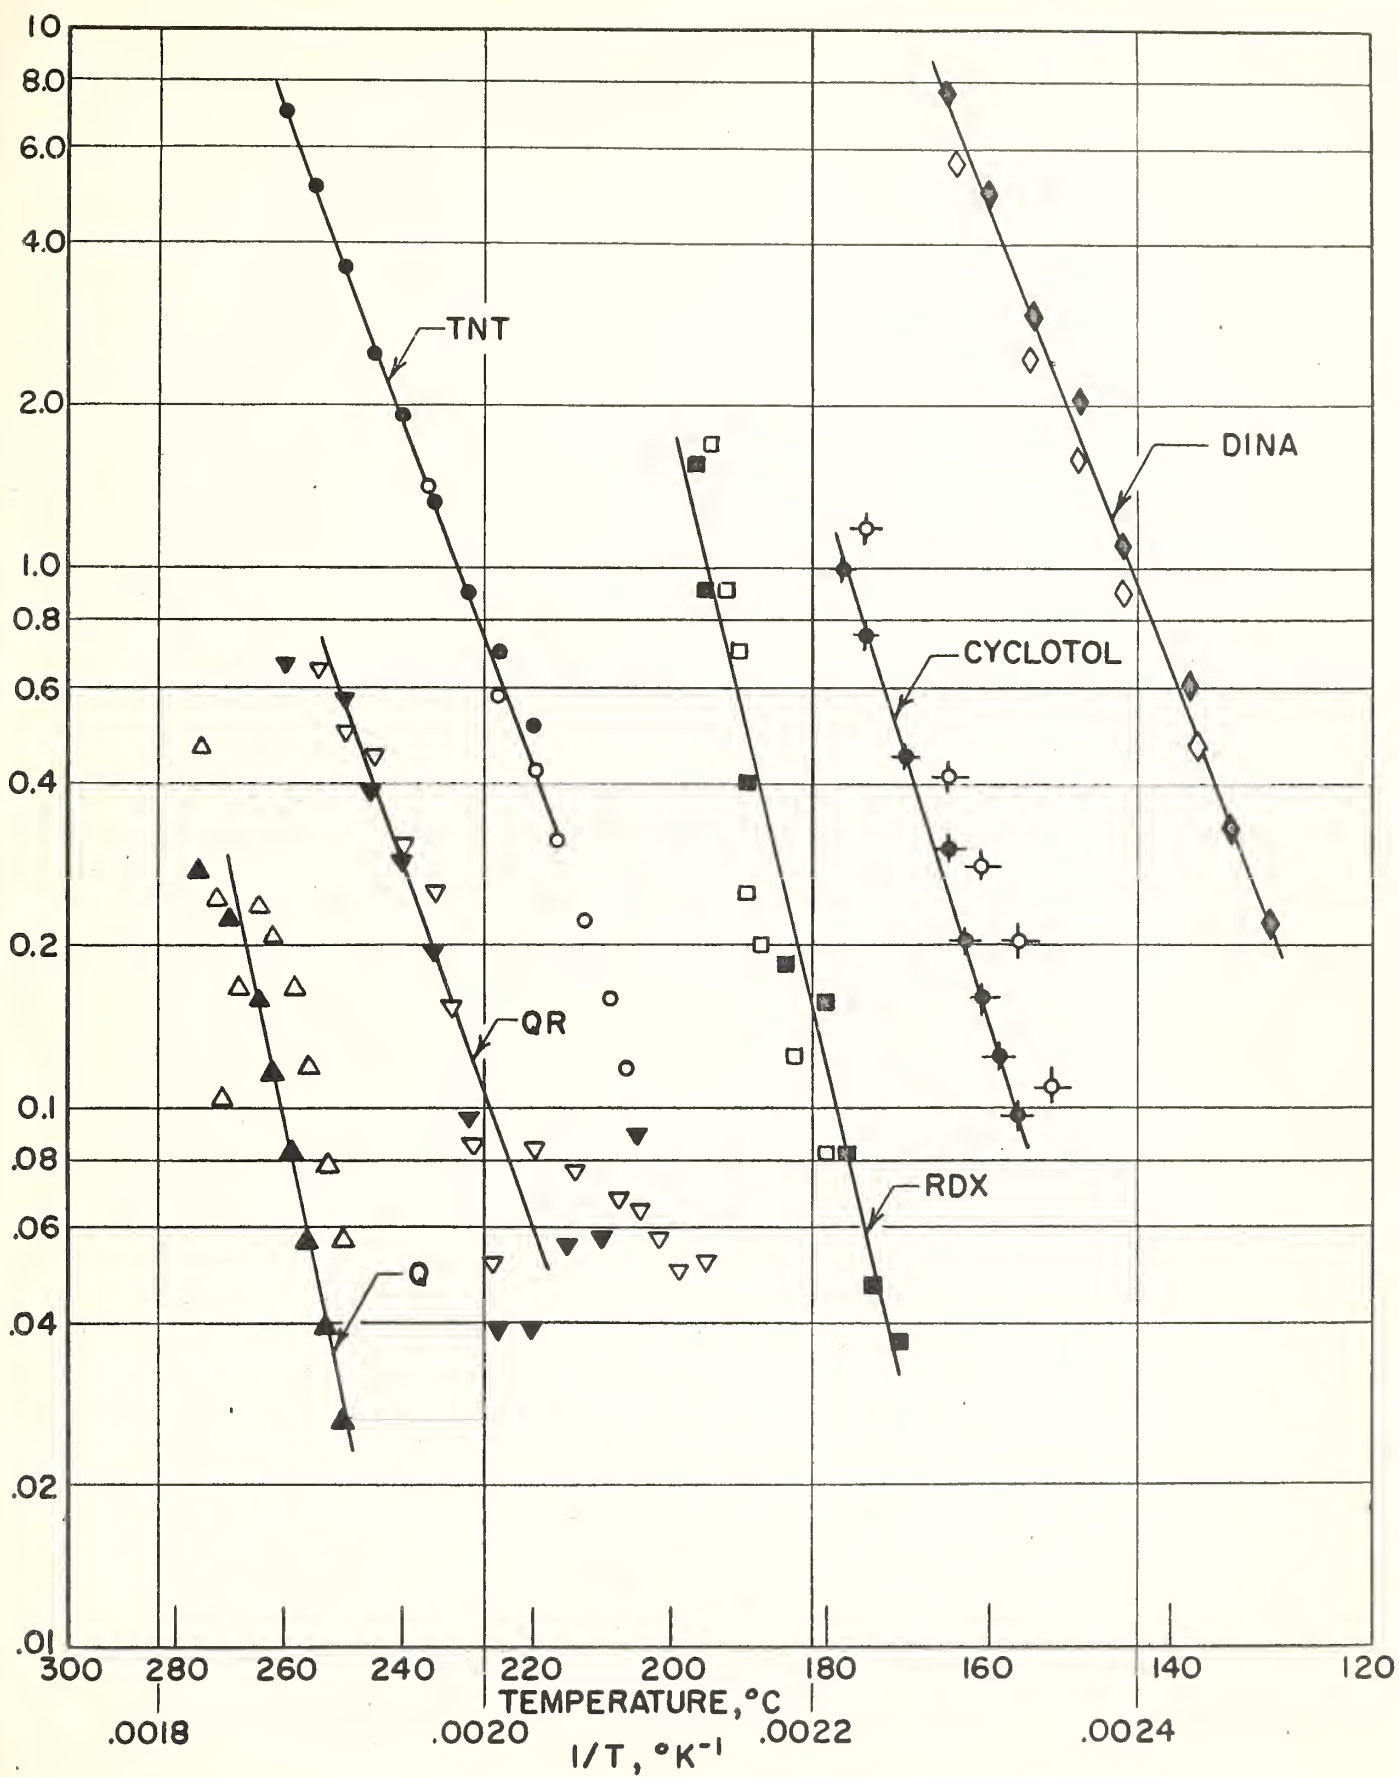


FIG.1 - ADIABATIC SELF-HEATING DATA FOR SIX EXPLOSIVES

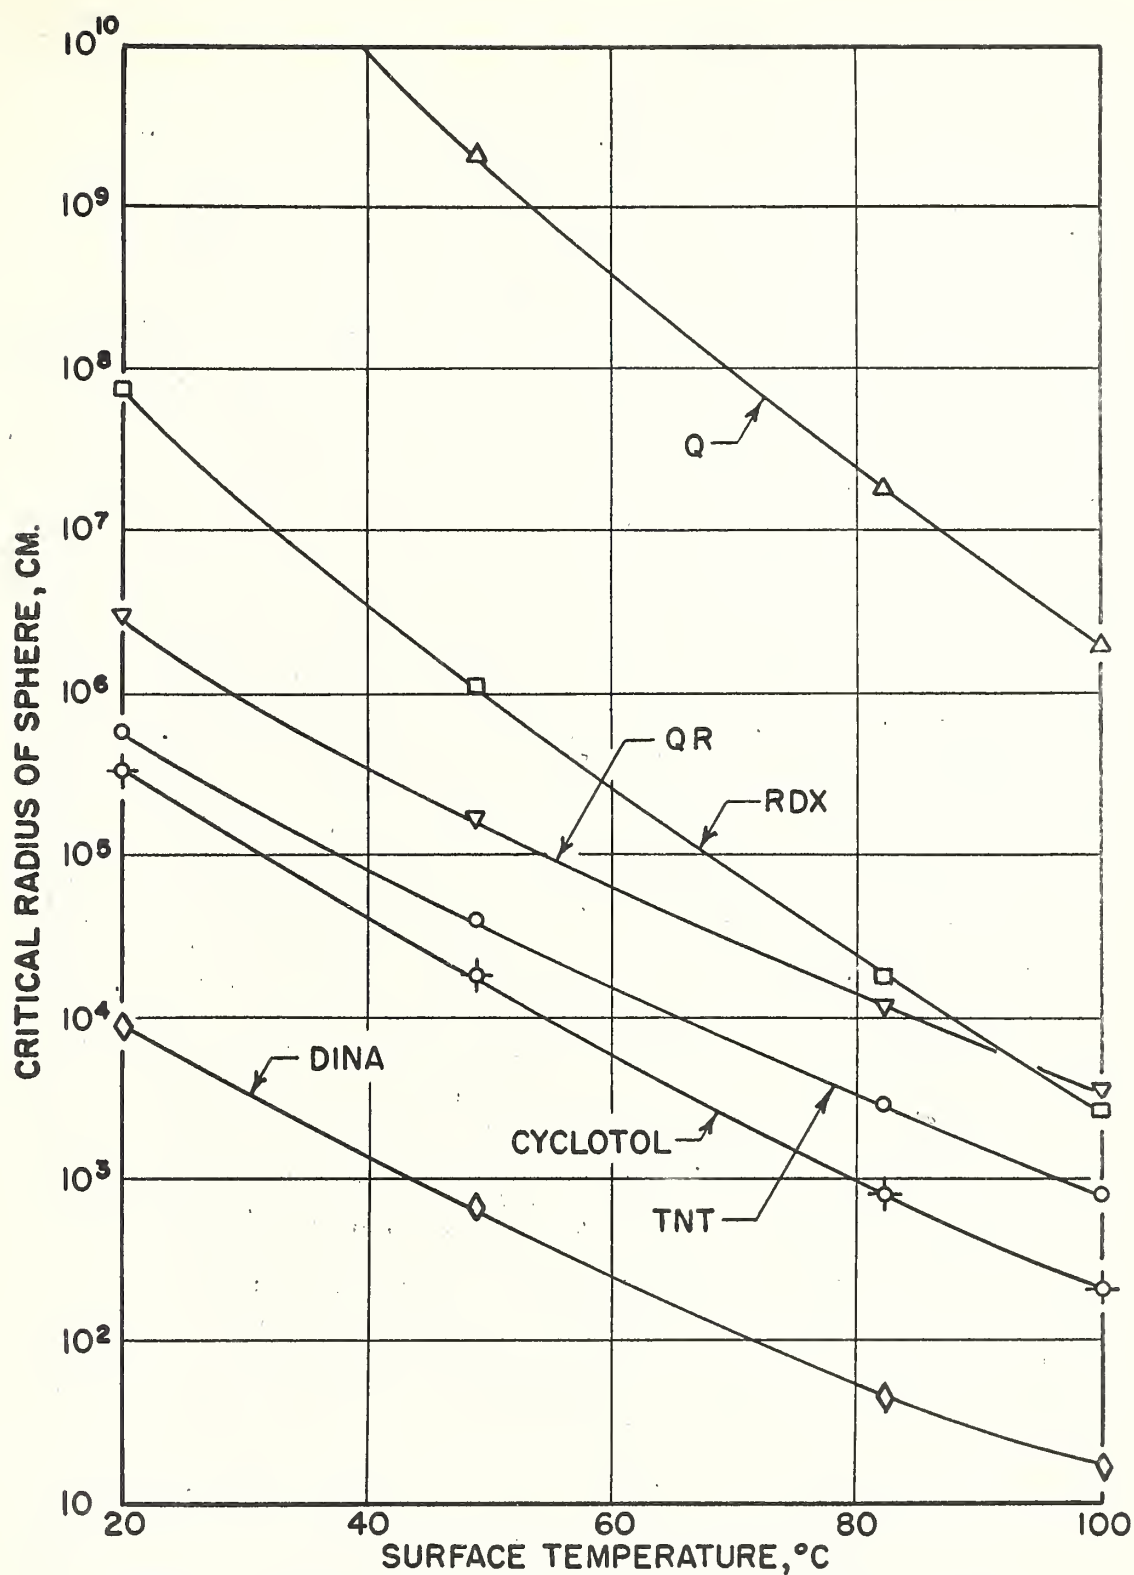


FIG. 2—COMPUTED CRITICAL RADII AND CRITICAL SURFACE TEMPERATURES FOR SPHERICAL PILES OF SIX EXPLOSIVES

U.S. DEPARTMENT OF COMMERCE

Frederick H. Mueller, Secretary

NATIONAL BUREAU OF STANDARDS

A. V. Astin, Director



THE NATIONAL BUREAU OF STANDARDS

The scope of activities of the National Bureau of Standards at its headquarters in Washington, D.C., and its major laboratories in Boulder, Colorado, is suggested in the following listing of the divisions and sections engaged in technical work. In general, each section carries out specialized research, development, and engineering in the field indicated by its title. A brief description of the activities, and of the resultant publications, appears on the inside of the front cover.

WASHINGTON, D.C.

Electricity and Electronics. Resistance and Reactance. Electron Devices. Electrical Instruments. Magnetic Measurements. Dielectrics. Engineering Electronics. Electronic Instrumentation. Electrochemistry.

Optics and Metrology. Photometry and Colorimetry. Optical Instruments. Photographic Technology. Length. Engineering Metrology.

Heat. Temperature Physics. Thermodynamics. Cryogenic Physics. Rheology. Engine Fuels. Free Radicals Research.

Atomic and Radiation Physics. Spectroscopy. Radiometry. Mass Spectrometry. Solid State Physics. Electron Physics. Atomic Physics. Neutron Physics. Radiation Theory. Radioactivity. X-rays. High Energy Radiation. Nuclear Instrumentation. Radiological Equipment.

Chemistry. Organic Coatings. Surface Chemistry. Organic Chemistry. Analytical Chemistry. Inorganic Chemistry. Electrodeposition. Molecular Structure and Properties of Gases. Physical Chemistry. Thermochemistry. Spectrochemistry. Pure Substances.

Mechanics. Sound. Mechanical Instruments. Fluid Mechanics. Engineering Mechanics. Mass and Scale. Capacity, Density, and Fluid Meters. Combustion Controls.

Organic and Fibrous Materials. Rubber. Textiles. Paper. Leather. Testing and Specifications. Polymer Structure. Plastics. Dental Research.

Metallurgy. Thermal Metallurgy. Chemical Metallurgy. Mechanical Metallurgy. Corrosion. Metal Physics.

Mineral Products. Engineering Ceramics. Glass. Refractories. Enameled Metals. Concreting Materials. Constitution and Microstructure.

Building Technology. Structural Engineering. Fire Protection. Air Conditioning, Heating, and Refrigeration. Floor, Roof, and Wall Coverings. Codes and Safety Standards. Heat Transfer.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering. Mathematical Physics.

Data Processing Systems. SEAC Engineering Group. Components and Techniques. Digital Circuitry. Digital Systems. Analog Systems. Application Engineering.

• Office of Basic Instrumentation.

• Office of Weights and Measures.

BOULDER, COLORADO

Cryogenic Engineering. Cryogenic Equipment. Cryogenic Processes. Properties of Materials. Gas Liquefaction.

Radio Propagation Physics. Upper Atmosphere Research. Ionospheric Research. Regular Propagation Services. Sun-Earth Relationships. VHF Research. Radio Warning Services. Airglow and Aurora. Radio Astronomy and Arctic Propagation.

Radio Propagation Engineering. Data Reduction Instrumentation. Modulation Systems. Radio Noise. Tropospheric Measurements. Tropospheric Analysis. Radio Systems Application Engineering. Radio-Meteorology. Lower Atmosphere Physics.

Radio Standards. High Frequency Electrical Standards. Radio Broadcast Service. High Frequency Impedance Standards. Electronic Calibration Center. Microwave Physics. Microwave Circuit Standards.

Radio Communication and Systems. Low Frequency and Very Low Frequency Research. High Frequency and Very High Frequency Research. Ultra High Frequency and Super High Frequency Research. Modulation Research. Antenna Research. Navigation Systems. Systems Analysis. Field Operations.

